


ENR SERIES

- These are non-polar capacitors designed for circuits with reversing polarity.
- Tolerance of $\pm 10\%$ (K) if required can also be available on request.
- Life time 105°C 1000 Hours

Characteristics

Voltage Range	10~160V								
Capacitance Range	0.47~1000uF								
Temperature Range	$-40 \sim +105^\circ\text{C}$								
Capacitance Tolerance	$+20\% -20\%$ (at 20°C , 120Hz)								
Leakage Current	$I=0.03C$ or $4\mu\text{A}$ max. (After 5 minutes)								
Dissipation Factor(tan δ)	Rated voltage	10V	16V	25V	35V	50V	63V	100V	160V
	$\tan \delta$	0.25	0.20	0.20	0.16	0.15	0.12	0.10	0.15
		(at 20°C , 120Hz)							
Stability at Low Temperature	Impedance ration at 120Hz								
	Rated Voltage (V)	10V	16V	25V	35V	50V	63V	100V	160V
	Z-25°C/Z 20°C	3	2	2	2	2	2	2	2
	Z-40°C/Z 20°C	6	4	4	3	3	3	3	-
Load Life	After rated voltage has been applied on each polarity for 500 hours at 105°C (Total 1000 hours)	Capacitance change D.F. ($\tan \delta$)	Within $\pm 15\%$ of initial value 150% of less of initial specified value						
		Leakage current	Initial specified value of less						

Diagram of dimensions

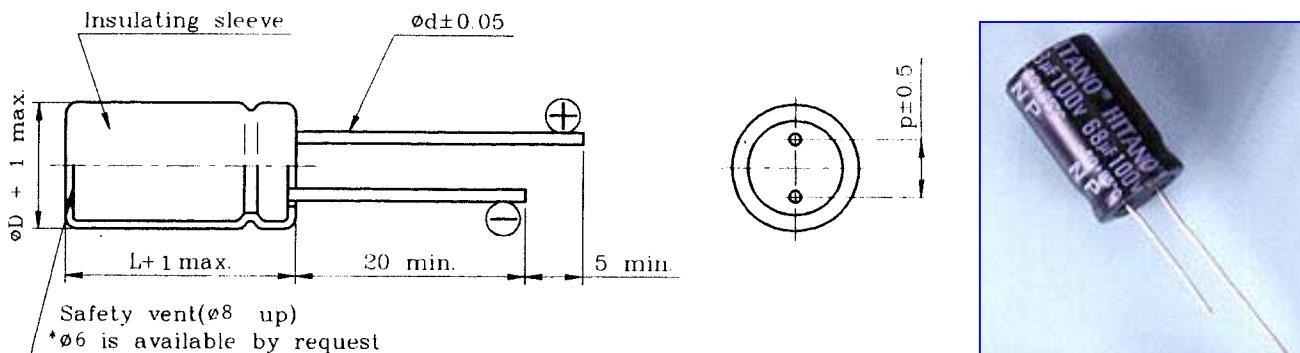

D ϕ	5	6.3	8	10	13	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
d ϕ	0.5		0.5		0.5	0.8	

Maximum Ripple Current mA rms 105°C , 120Hz

Case Size of Standard Products

DxL(mm)

WV uF	10v	16v	25v	35v	50v	63v	100v	160V	10V	16V	25V	35V	50V	63V	100V	160V
0.47					7	7	8	12	All Blank Voltage on sleeve markings is same voltage"→" point to							
1					10	10	12	19								
2.2					15	15	20	30								
3.3					18	20	25	39								
4.7					22	24	30	45								
10			30	30	37	40	50	80								
22		40	46	51	63	68	97	150								
33		49	56	72	77	98	140	230								
47	54	67	67	86	105	130	170	265								
100	90	110	110	160	190	225	300	450								
220	150	195	215	290	340	405										
330	240	265	320	350	460	535										
470	290	345	380	465	590											
1000	510	605														
									10x13	13x26						