
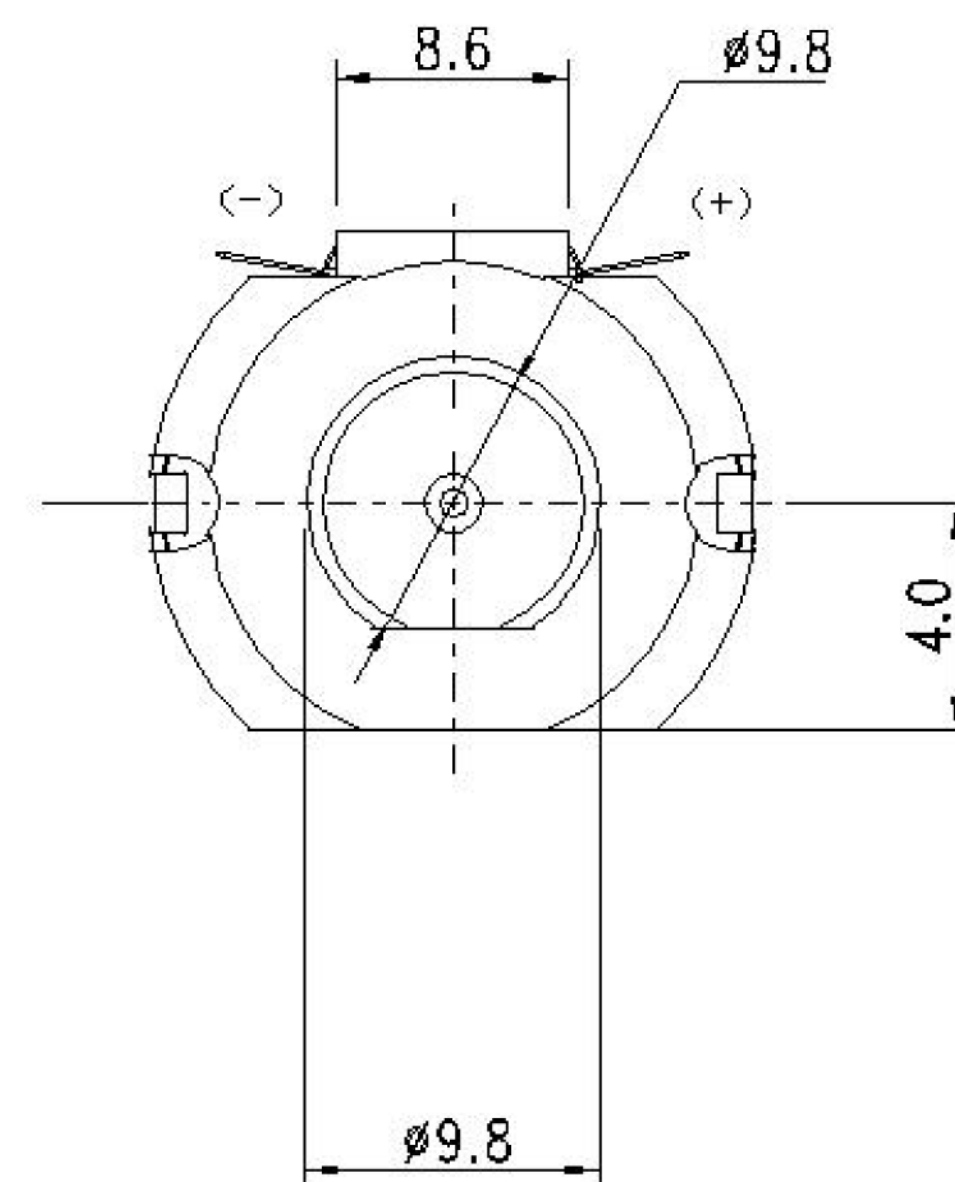
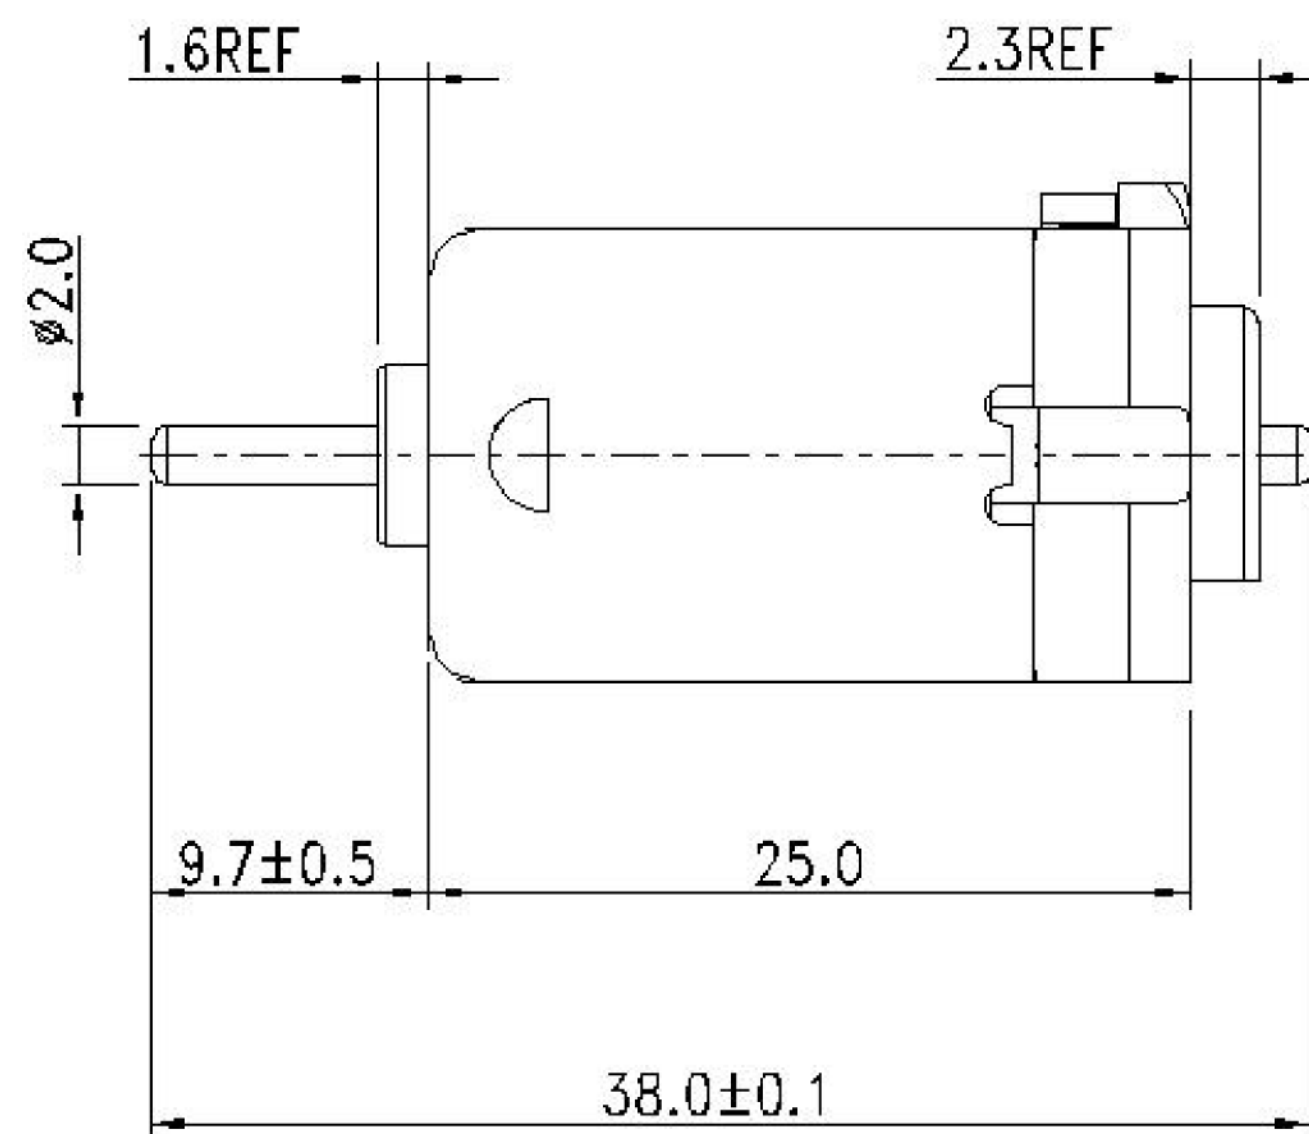


FÜR DIESE ZEICHNUNG BEHALTEN WIR
UNS ALLE RECHTE NACH DIN 34 FÜR

未注公差			圆角半径和倒角高度		
0~6	6~30	30~120	0~3	3~6	6~30
±0.06	±0.1	±0.2	±0.2	±0.5	±0.8

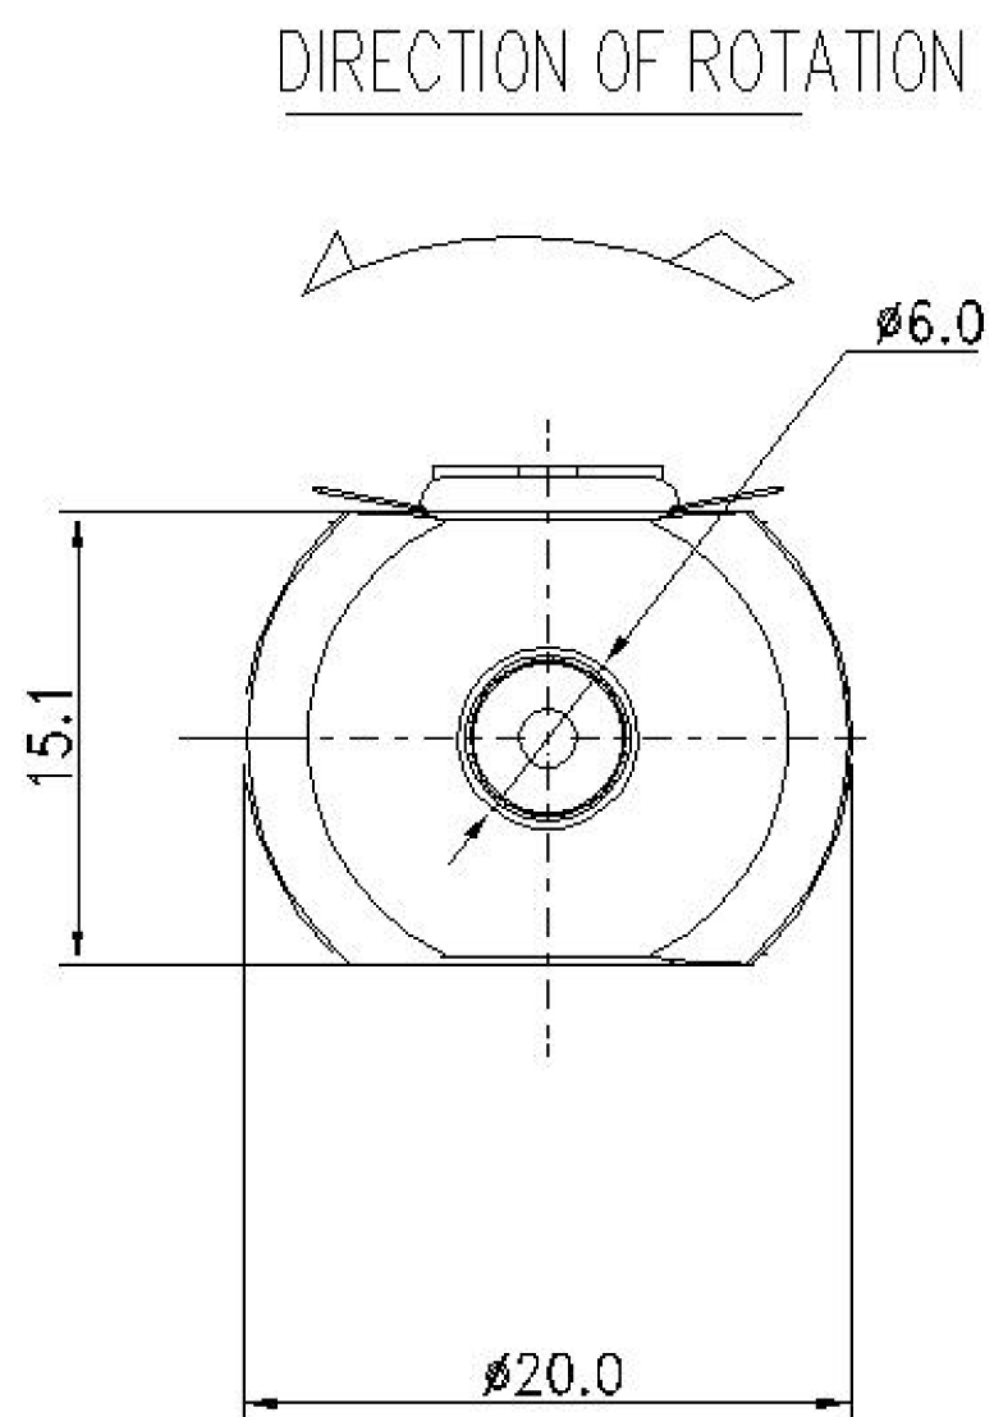

TITEL:	外形图	A4	DRAWER:		
MATERIAL:	HS-RE130-2270-38		CHECKER:		
DAWING NO:			APPROVER:		
			DO NOT SCALE THE DAWING		

MOTOR OUTGOING SPECIFICATION

Model No. : HS-RE130-2270-38

Sample No. :

1.Motor Type:
马达类型

Small PMDC motor
微型直流马达

2.Standard Operating Conditions:
标准工作条件

2-1 Rated Voltage(额定电压): 3.0V DC CONSTANT between motor terminals(端子电压3.0V)

2-1 Direction of Rotation(旋转方向): CCW, when viewed from output shaft side(从输出轴端看CCW)

3.Electrical Characteristics(at initial stage after 30 seconds run-in):
电气特性(起动30秒后初始阶段)

3-1 No Load Current(空载电流): 0.4A max

3-2 No Load Speed(空载转速): 16000±10%rpm

3-3 Rated Load(tested with fan mm): 11.9g.cm
额定负载(mm风叶)

3-4 Rated Current(额定电流): 1.5A max

3-5 Rated Speed(额定转速): 12400±8%rpm

3-6 Noise(噪音): 30cm≤68dB

3-7 Motor Characteristic Curve(马达特性曲线): See Motor Performance Curves And Characteristics(看马达特性曲线图).

4.Mechanical Characteristics:
机械特性

4-1 External Apperance(外形): See Outline(看外形图)

4-2 End Play(端位): 0.05~0.45mm

4-3 Runout of Shaft Extension(轴突端跳动): 0.02mm max

CONFIRMED & ACCEPTED BY CUSTOMER (客户接受&确认)

COMPANY,CHOP & SIGNATURE (盖章&签名)

PREPARED: _____ CHECKED: _____ APPROVED: _____